



FRONTAL BUCKET


B-STD

TECHNICAL SPECIFICATIONS

- 1 Notched step for climbing
- 2 Bucket bottom anti-rubbing bands

DESCRIPTION

Front loading bucket ideal for loading materials with specific weight from 1.5 to 2.5 kg / dm³. The U.Emme front loading buckets' range stands out for its strength and wear resistance. Can be combined with any type of skid steer loader and on wheel loaders, backhoe loaders and telescopic handlers of small and medium tonnage.

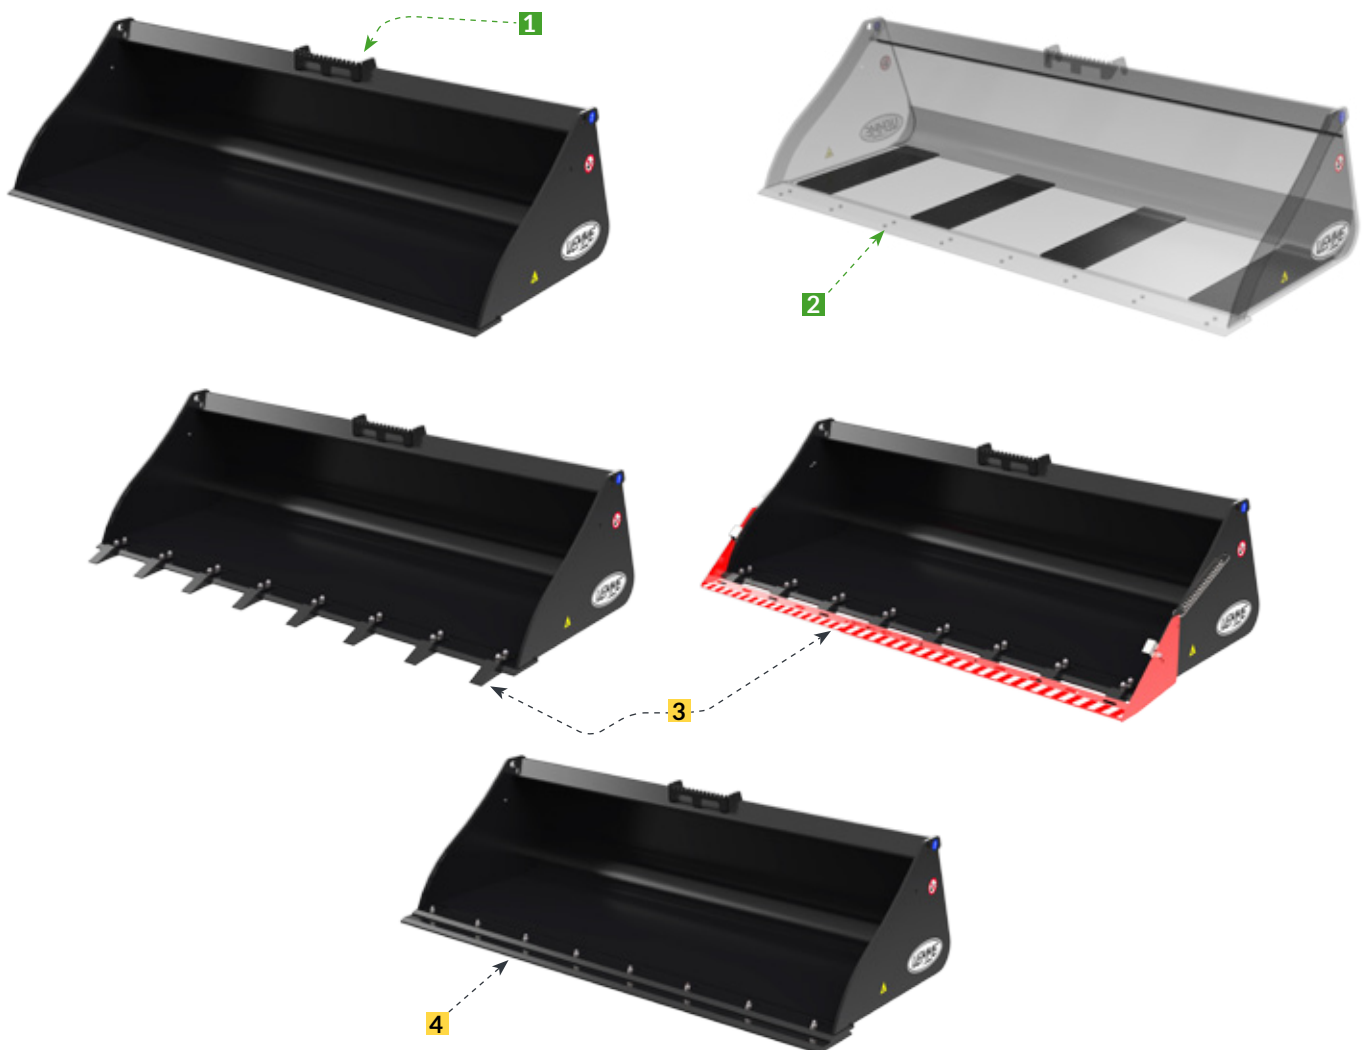

MODELS		B-STD 1250	B-STD 1400	B-STD 1550	B-STD 1680	B-STD 1730	B-STD 1880	B-STD 2030
Width	mm	1250	1400	1550	1680	1730	1880	2030
Depth	mm	910	910	910	910	910	910	910
Height	mm	570	570	570	570	570	570	570
SAE capacity	m ³	0,351	0,397	0,442	0,482	0,497	0,543	0,588
Weight without linkage	Kg	230	240	250	260	270	280	310
	Tons	0,4÷3,3	1,1÷4	1,7÷4,5	2,2÷4,7	2,8÷5	3÷6	3,5÷8

OPTIONS

- 3** Bolted teeth and security removable protection
- 4** Bolted and reversible underplate

LINKAGE SYSTEMS

- Universal linkage for Skid-Steer Loader
- Non universal linkage for Skid-Steer Loader
- Wheel Loaders, Backhoe Loaders and Telehandlers linkage

APPLICATIONS

- INDUSTRIAL SECTOR
- BUILDING SECTOR
- AGRICULTURAL SECTOR
- EXCAVATION AND BACKFILLING OPERATIONS
- SNOW, WASTE, DEBRIS CLEARANCE



3



2, 4

