




ANGLED OZER BLADE LA


TECHNICAL SPECIFICATIONS

1 2 double-acting hydraulic cylinders for right / left angulation of the blade

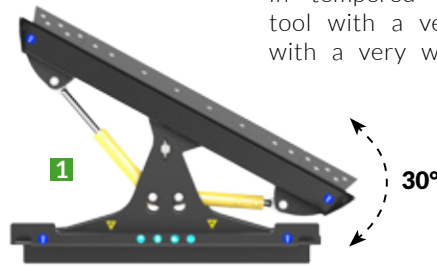

DESCRIPTION




Angledozer blade ideal for backfilling and earth or landfill materials spreading jobs. Standard equipped with **2 double-acting hydraulic cylinders for right / left angulation**, bolted knife in tempered steel and flexible hoses. Essential tool with a very simple use, it can be combined with a very wide range of earthmoving machines.

MODELS		LA 1500	LA 1600	LA 1800	LA 2100	LA 2400
Blade width	mm	1500	1600	1800	2100	2400
Working width at maximum angulation	mm	1300	1385	1558	1818	2078
Blade maximum angulation (rotation)	°	± 30	± 30	± 30	± 30	± 30
Weight without linkage	Kg	240	250	265	290	315
	Tons	1÷3,5	1,5÷4	1,5÷5	2÷6,5	3÷8,5

OPTIONS

8 Blocking valve

LINKAGE SYSTEMS

-  Universal linkage for Skid-Steer Loader
-  Non universal linkage for Skid-Steer Loader
-  Wheel Loaders, Backhoe Loaders and Telehandlers linkage

APPLICATIONS

- INDUSTRIAL SECTOR
- BUILDING SECTOR
- AGRICULTURAL SECTOR
- EARTH DOZING, MOVING AND BACKFILLING OPERATIONS

