



# SNOW BLOWER


# YETI HD


## STANDARD EQUIPMENT

- 1 Bolted hardened steel cutting edge
- 2 Ice breaker helices in Hardox®
- 3 Set up for bolted linkage plate
- 4 Side adjustable slides

## DESCRIPTION

Yeti HD is a front dual-stage snow blower specially designed for combinations on big machinery such as loaders, Backhoe Loaders and Telehandlers. A **high-performance piston hydraulic motor** supplies the main power and a **torque limiter** prevents the possibility of accidental damages due to objects hidden in the snow, such as stones or wood branches, that can get stuck in the rotating screw. In addition each model is equipped with **hydraulically powered snow output chimney and flaps** and icebreaker helices in **HARDOX®** metal decreasing as much as possible the wear caused by gravel and stones mixed with snow.

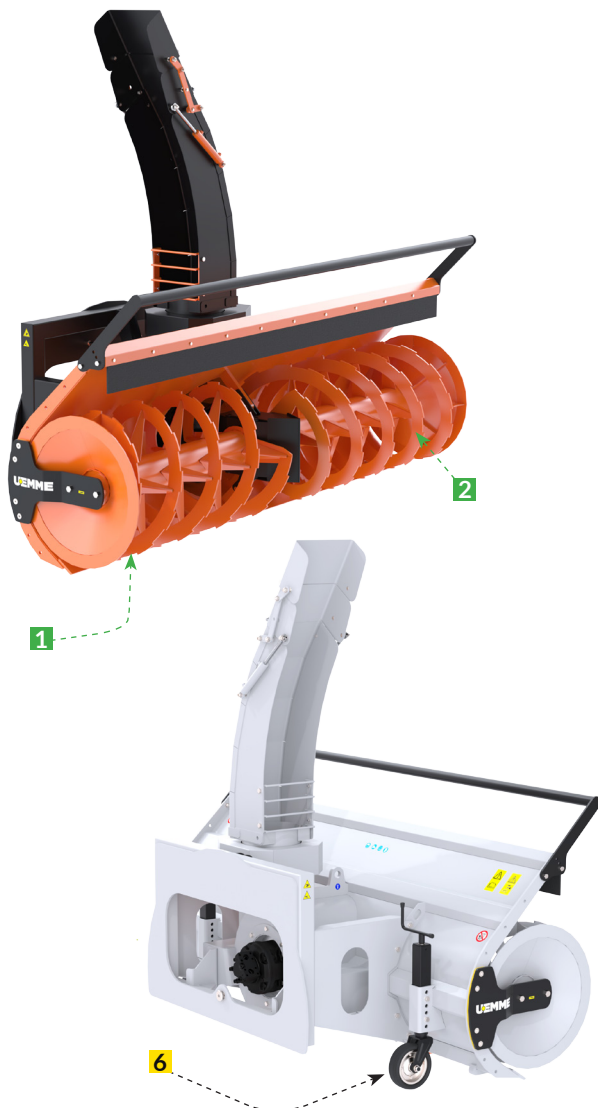

MODELS		YETI 2100 HD	YETI 2300 HD	YETI 2500 HD
Working width	mm	2100	2300	2500
Weight without linkage	Kg	890	950	1040
1 <sup>st</sup> and 2 <sup>nd</sup> stage helices Ø	mm	630 / 550	630 / 550	630 / 550
Frontal height	mm	1000	1000	1000
Minimum-maximum oil flow	l/1'	90 - 140	90 - 140	90 - 140
Minimum-maximum pressure	bar	140 - 170	140 - 170	140 - 170
Chimney rotation angle	°	240	240	240
	Tons	≥ 5	≥ 6	≥ 7

**FUNCTIONS SET UP**

- 5** 3 lines hydraulic chute and flap regulation
- A** 2 levers manipulator
- B** On/off radio remote control

**OPTIONS**

- 6** Pair of side free 360° rotating wheels adjustable in height

**LINKAGE SYSTEMS**

- Universal linkage for Skid-Steer Loader
- Non universal linkage for Skid-Steer Loader
- WLoaders, Backhoe L. & Telehandlers linkage

**APPLICATIONS**

- ROAD MAINTENANCE
- VIABILITY RESTORING
- SNOW REMOVAL FROM URBAN AND EXTRAURBAN ROADS

